


Frame space 10 1/2"  
 Keel white oak 1 1/2" thick 1/2" below railbate  
 Stem " " 3 3/4" sided  
 Timbers " " 1 1/2" sq. at head tapering both ways  
 1/2" per foot for full length  
 Planking 3/32" cedar + 7/16" mahogany  
  
 Deck white pine or cedar 3/4" covered with canvas  
 Clamps Oregon pine 2 1/2" x 2 1/4"  
 Bilge stringer " " 1 1/8" x 3 3/8" runs 3/4" small length  
 ends can taper to 20% reduction of area.  
 tapered only for 1/4 of length each end to 1/4" 2 1/2"  
 Deckbeams white oak sided 1 1/2" and moulded 2 1/2"  
 in middle and reduces to 1 1/2" at ends. Out beams  
 are moulded 1 1/2" all the way, beams # 16-17-18-35  
 are sided 1 1/8" # 28 special 1/2" thick  
 Crown 5" in 10'-6"  
 House deck white pine or cedar 3/4" covered with canvas  
 " sides + ends white oak full 3/4" or its equivalent  
 in weight made of 1 1/2" Mahogany 9" high sides.  
 Deckhouse 35 sq. feet area min. height 7" to top at  
 side on ends

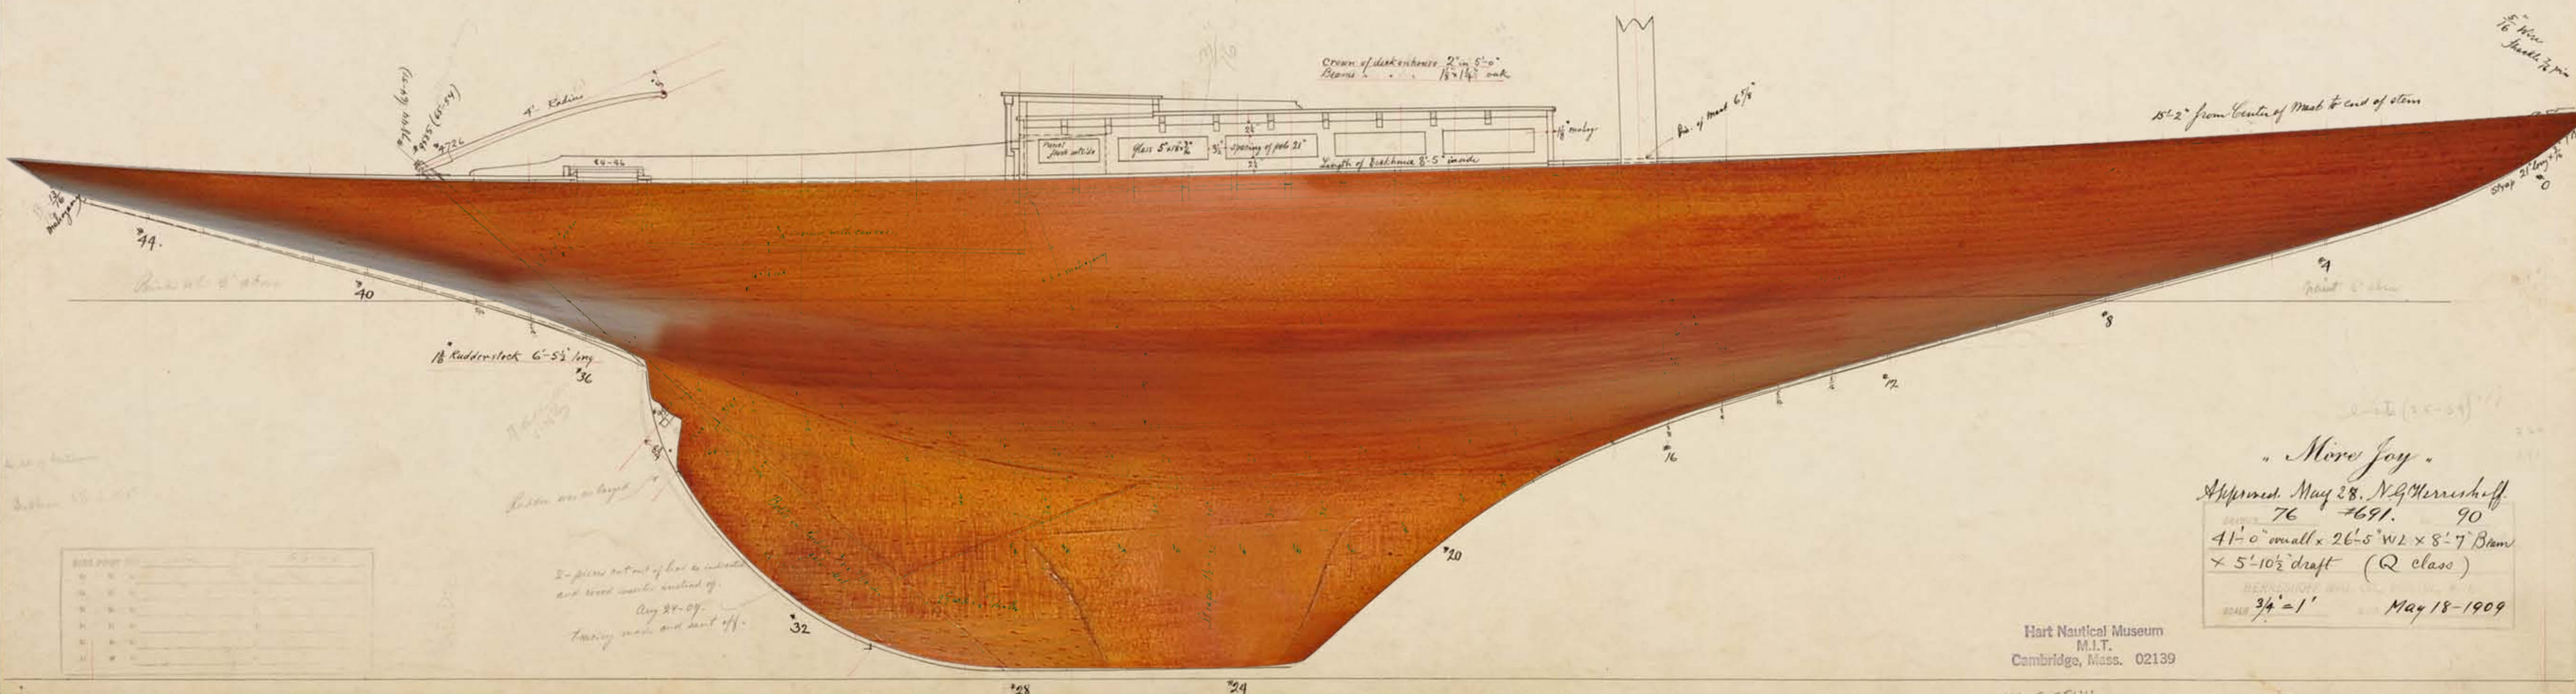

"Morse Jory"  
 Appointed May 28. N. G. Merrishoff  
 #691. 90  
 41'-0" small x 26'-5" WL x 8'-7" Beam  
 x 5'-10 1/2" draft (Q class)  
 BEARINGS AND  
 READ 3/4" = 1' May 18-1909

Hart Nautical Museum  
 M.I.T.  
 Cambridge, Mass. 02139

HA. 5. 5544